



ELECTRIC VEHICLE
PORTABLE CHARGER / WALLBOX CHARGER
PROFESSIONAL SUPPLIERS




EV CHARGER CATALOGUE

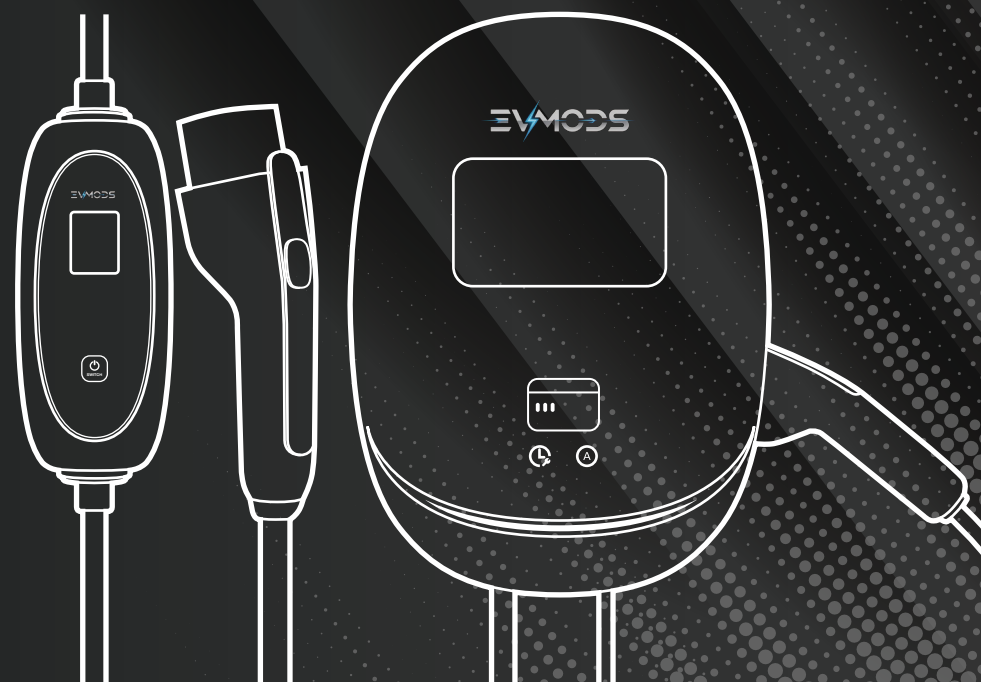


 Mr. Elie Meouchi

 +961 70 323 332

 Mr. Dory Bou Najm

 +961 70 221 104

 evmods.com.lb

P01 3.5kW / 7kW PORTABLE EV CHARGER

*Female socket require an additional purchase



Parameter

Connector	GB/T	Type2	Type1	Tesla		
Size	200mm*80mm*55mm					
Package Size	400mm*400mm*110mm					
Weight	< 3kg					
Housing Material	Acrylic, PC					
Mating Cycle Life	> 10,000 times					
Input/Output Voltage	220V	220V	110V ~ 250V	110V ~ 250V		
Max Output Current	16A / 32A	16A / 32A	16A / 32A	16A / 32A		
Rated Power	3.5kW / 7kW	3.5kW / 7kW	3.5kW / 7kW	3.5kW / 7kW		
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz		
RCD	Type A + DC6mA					
User Interface	LED Indicator					
Communication Method	Wifi, Bluetooth (Optional)					
Temperature	-30°C ~ +55°C					
Humidity	5% ~ 95%					
Altitude	< 2000m					
Cooling Methods	Natural Cooling					
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection					
Ingress Protection Rating	IP65					
Flame Retardant Rating	UL94 V0					
Cable Material	TPU					
Cable Length	5m (Customize)					
Plug	Schuko	GB/T	Nema 5-20	AU	UK	ZA
	BRA	Blue Cee	Red Cee	Nema 14-50	More	

P02 3.5kW ~ 7kW PORTABLE EV CHARGER

*Female socket require an additional purchase



Parameter

Connector	GB/T	Type2	Type1	Tesla		
Size	200mm*80mm*55mm					
Package Size	400mm*400mm*110mm					
Weight	< 3kg					
Housing Material	Acrylic, PC					
Mating Cycle Life	> 10,000 times					
Input/Output Voltage	220V	220V	110V ~ 250V	110V ~ 250V		
Max Output Current	16A / 32A	16A / 32A	16A / 32A	16A / 32A		
Rated Power	3.5kW ~ 7kW	3.5kW ~ 7kW	3.5kW ~ 7kW	3.5kW ~ 7kW		
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz		
RCD	Type A + DC6mA					
User Interface	LED Indicator, 1.8 inch LCD Screen					
Communication Method	Wifi, Bluetooth (Optional)					
Temperature	-30°C ~ +55°C					
Humidity	5% ~ 95%					
Altitude	< 2000m					
Cooling Methods	Natural Cooling					
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection					
Ingress Protection Rating	IP65					
Flame Retardant Rating	UL94 V0					
Cable Material	TPU					
Cable Length	5m (Customize)					
Plug	Schuko	GB/T	Nema 5-20	AU	UK	ZA
	BRA	Blue Cee	Red Cee	Nema 14-50	More	

P03 3.5kW ~ 7kW PORTABLE EV CHARGER

*Female socket require an additional purchase



Parameter

Connector	GB/T	Type2	Type1	Tesla		
Size	225mm*100mm*53mm					
Package Size	400mm*400mm*110mm					
Weight	< 3kg					
Housing Material	Acrylic, PC					
Mating Cycle Life	> 10,000 times					
Input/Output Voltage	220V	220V	110V ~ 250V	110V ~ 250V		
Max Output Current	16A / 32A	16A / 32A	16A / 32A	16A / 32A		
Rated Power	3.5kW ~ 7kW	3.5kW ~ 7kW	3.5kW ~ 7kW	3.5kW ~ 7kW		
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz		
RCD	Type A + DC6mA					
User Interface	LED Indicator, 2.8 inch LCD Screen					
Communication Method	Wifi, Bluetooth (Optional)					
Temperature	-30°C ~ +55°C					
Humidity	5% ~ 95%					
Altitude	< 2000m					
Cooling Methods	Natural Cooling					
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection					
Ingress Protection Rating	IP65					
Flame Retardant Rating	UL94 V0					
Cable Material	TPU					
Cable Length	5m (Customize)					
Plug	Schuko	GB/T	Nema 5-20	AU	UK	ZA
	BRA	Blue Cee	Red Cee	Nema 14-50	More	

P05 3.5kW / 7kW PORTABLE EV CHARGER

*Female socket require an additional purchase



Parameter

Connector	GB/T	Type2	Type1	Tesla		
Size	200mm*80mm*55mm					
Package Size	400mm*400mm*110mm					
Weight	< 3kg					
Housing Material	Acrylic, PC					
Mating Cycle Life	> 10,000 times					
Input/Output Voltage	220V	220V	110V ~ 250V	110V ~ 250V		
Max Output Current	16A / 32A	16A / 32A	16A / 32A	16A / 32A		
Rated Power	3.5kW / 7kW	3.5kW / 7kW	3.5kW / 7kW	3.5kW / 7kW		
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz		
RCD	Type A + DC6mA					
User Interface	LED Indicator					
Communication Method	Wifi, Bluetooth (Optional)					
Temperature	-30°C ~ +55°C					
Humidity	5% ~ 95%					
Altitude	< 2000m					
Cooling Methods	Natural Cooling					
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection					
Ingress Protection Rating	IP65					
Flame Retardant Rating	UL94 V0					
Cable Material	TPU					
Cable Length	5m (Customize)					
Plug	Schuko	GB/T	Nema 5-20	AU	UK	ZA
	BRA	Blue Cee	Red Cee	Nema 14-50	More	

P09 3.5kW EV DISCHARGER-CHARGER



Parameter

Parameter	GB/T	Type2	Type1
Connector			
Size	200mm*90mm*65mm		
Package Size	400mm*400mm*110mm		
Weight	< 3kg		
Housing Material	Acrylic, PC		
Mating Cycle Life	> 10,000 times		
Input/Output Voltage	220V	220V	110V ~ 250V
Max Output Current	16A	16A	16A
Rated Power	3.5kW	3.5kW	3.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA		
User Interface	LED Indicator		
Communication Method	Wifi, Bluetooth (Optional)		
Temperature	-30°C ~ +55°C		
Humidity	5% ~ 95%		
Altitude	< 2000m		
Cooling Methods	Natural Cooling		
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection		
Ingress Protection Rating	IP65		
Flame Retardant Rating	UL94 V0		
Cable Material	TPU		
Cable Length	5m (Customize)		
Plug			
Socket			

P10 7kW~22kW PORTABLE EV CHARGER

*Female socket require an additional purchase



Parameter

Connector	GB/T	Type2	Type1	Tesla		
Size	300mm*200mm*120mm					
Package Size	400mm*400mm*110mm					
Weight	< 3kg					
Housing Material	Acrylic, PC					
Mating Cycle Life	> 10,000 times					
Input/Output Voltage	240V	240V	240V	240V		
Max Output Current	16A / 32A	16A / 32A	16A / 32A	16A / 32A		
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 22kW		
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz		
RCD	Type A + DC6mA					
User Interface	LED Indicator					
Communication Method	Wifi, Bluetooth (Optional)					
Temperature	-30°C ~ +55°C					
Humidity	5% ~ 95%					
Altitude	< 2000m					
Cooling Methods	Natural Cooling					
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection					
Ingress Protection Rating	IP65					
Flame Retardant Rating	UL94 V0					
Cable Material	TPU					
Cable Length	5m (Customize)					
Plug	Schuko	GB/T	Nema 5-20	AU	UK	ZA
	BRA	Blue Cee	Red Cee	Nema 14-50	More	

WP01 7kW~22kW WALLBOX EV CHARGER



Parameter

Connector	GB/T	Type2	Type1	Tesla
Size	310mm*220mm*120mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase	 1-Phase		 3-Phase	

DP02 7kW~22kW WALLBOX EV CHARGER



Parameter

Connector	GB/T	Type2	Type1	Tesla
Size	350mm*220mm*80mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator, 4.3 inch LCD Screen			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase	 1-Phase		 3-Phase	


WP04 7kW~22kW WALLBOX EV CHARGER



Parameter

Connector	 GB/T	 Type2	 Type1	 Tesla
Size	270mm*172mm*90mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 hours			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase				
	1-Phase		3-Phase	

WP09 7kW~22kW WALLBOX EV CHARGER

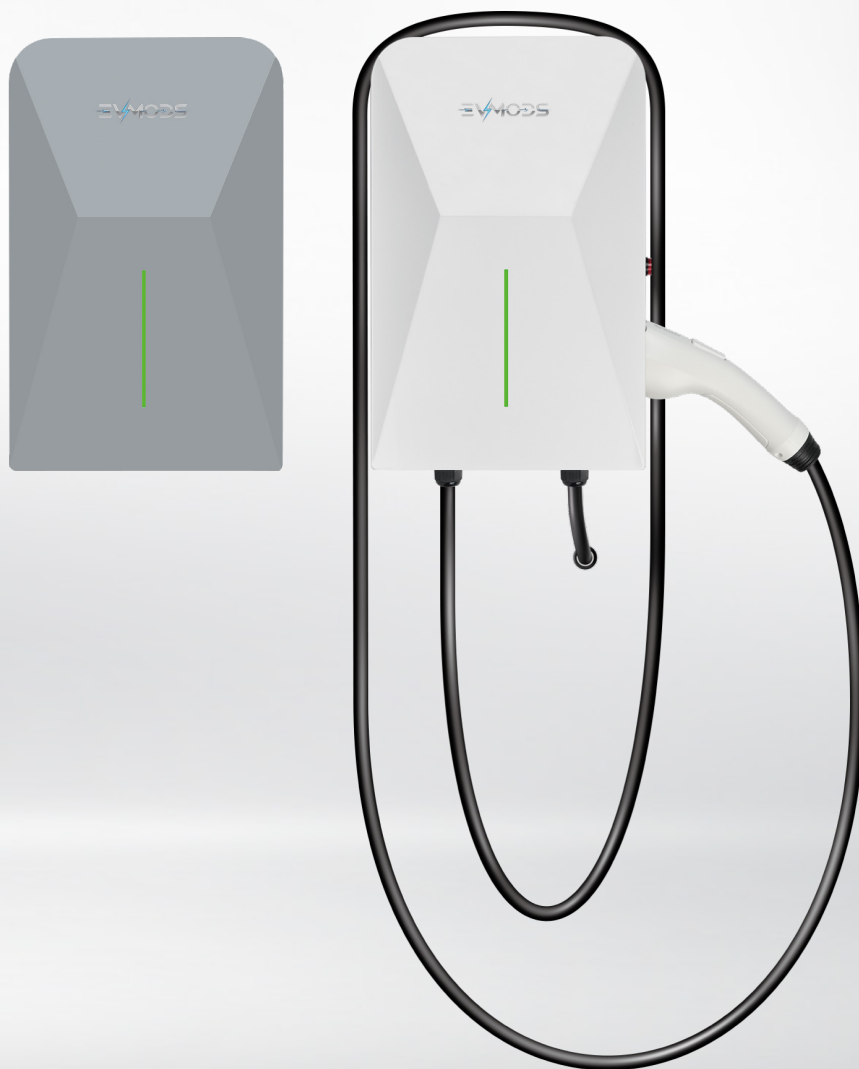







Parameter

Connector	 GB/T	 Type2	 Type1	 Tesla
Size	380mm*240mm*105mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase				
	1-Phase		3-Phase	

WP11 7kW~22kW WALLBOX EV CHARGER









Parameter

Connector	 GB/T	 Type2	 Type1	 Tesla
Size	380mm*240mm*105mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase				
	1-Phase		3-Phase	

DP15 7kW~22kW WALLBOX EV CHARGER



Parameter

Connector	 GB/T	 Type2	 Type1	 Tesla
Size	385mm*247mm*95mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	4.3 inch LCD Screen			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase	 1-Phase		 3-Phase	

DP20 7kW~22kW WALLBOX EV CHARGER



Parameter

Connector	GB/T	Type2	Type1	Tesla
Size	370mm*305mm*120mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator, 4.3 inch LCD Screen			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase				
	1-Phase		3-Phase	

WP21 7kW~22kW WALLBOX EV CHARGER



Parameter

Parameter	GB/T	Type2	Type1	Tesla
Connector				
Size	235mm*220mm*125mm			
Package Size	410mm*300mm*220mm			
Weight	< 5kg			
Housing Material	Acrylic, PC			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	240V	240V	240V	240V
Max Output Current	16A / 32A	16A / 32A	30A / 40A / 50A	30A / 40A / 50A
Rated Power	7kW ~ 22kW	7kW ~ 22kW	7kW ~ 11.5kW	7kW ~ 11.5kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LED Indicator			
Communication Method	Wifi, Bluetooth (Optional)			
Temperature	-30°C ~ +55°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP65			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase				

DC01 7kW DC EV CHARGER









Parameter

Parameter	GB/T	Type2	Type1	Tesla
Connector				
Size	480mm*320mm*90mm			
Package Size	510mm*350mm*120mm			
Weight	< 10kg			
Housing Material	Metal			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	220V / 380V	240V / 400V	240V	240V
Max Output Current	50A	50A	30A	30A
Rated Power	7kW	7kW	7kW	7kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	2.4 inch LCD Screen			
Communication Method	IC Card, Wifi			
Temperature	-20°C ~ +50°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP54			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase	 1-Phase			

DC03 20kW~30kW DC EV CHARGER



Parameter

Connector	 GB/T	 Type2	 Type1	 Tesla
Size	720mm*450mm*220.5mm			
Package Size	750mm*470mm*240mm			
Weight	≈ 67kg			
Housing Material	Metal			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	220V / 380V	240V / 400V	240V	240V
Max Output Current	50A	50A	30A	30A
Rated Power	20kW/30kW	20kW/30kW	20kW/30kW	20kW/30kW
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LCD Screen, LED Indicator			
Communication Method	IC Card, 4G			
Temperature	-20°C ~ +50°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP54			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase				
	1-Phase		3-Phase	

TK Series 20kW~40kW DC EV CHARGER



Parameter

Parameter	GB/T	Type2	Type1	Tesla
Connector				
Size	650mm*450mm*216mm			
Package Size	800mm*600mm*400mm			
Weight	≈ 45kg			
Housing Material	Metal			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	380V	380V	240V	240V
Max Output Current	100A	100A	100A	100A
Rated Power	20kW / 30kW / 40kW			
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LCD Screen, LED Indicator			
Communication Method	IC Card, 4G, OCPP1.6J			
Temperature	-30°C ~ +50°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP54			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			

Phase



3-Phase

S Series **40kW** DC EV CHARGER



Parameter

Parameter	GB/T	Type2	Type1	Tesla
Connector				
Size	650mm*1000mm*1700mm			
Package Size	750mm*1100mm*1800mm			
Weight	≈ 118kg			
Housing Material	Metal			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	380V	380V	240V	240V
Max Output Current	125A	125A	125A	125A
Rated Power	40kW			
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LCD Screen, LED Indicator			
Communication Method	IC Card, 4G, OCPP1.6J			
Temperature	-30°C ~ +50°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP54			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			
Phase	 3-Phase			

Z Series 80kW~320kW DC EV CHARGER



Parameter

Connector	 GB/T	 Type2	 Type1	 Tesla
Size	770mm*1070mm*2030mm			
Package Size	870mm*1170mm*2130mm			
Weight	≈ 250kg			
Housing Material	Metal			
Mating Cycle Life	> 10,000 times			
Input/Output Voltage	380V	380V	240V	240V
Max Output Current	200A	200A	200A	200A
Rated Power	80kW / 120kW / 160kW / 240kW / 320kW			
Frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
RCD	Type A + DC6mA			
User Interface	LCD Screen, LED Indicator			
Communication Method	IC Card, 4G, OCPP1.6J			
Temperature	-30°C ~ +50°C			
Humidity	5% ~ 95%			
Altitude	< 2000m			
Cooling Methods	Natural Cooling			
Electrical Protection	Over/Under Voltage Protection, Over Temperature Protection, Lightning Protection, Leakage Protection, Short Circuit Protection			
Ingress Protection Rating	IP54			
Flame Retardant Rating	UL94 V0			
Cable Material	TPU			
Cable Length	5m (Customize)			

Phase



3-Phase



Parameter	
Adapter Type	GB/T to Tesla
Rated Current	32A
Rated Voltage	110V ~ 250V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	185mm*63mm*56mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	Type2 to Tesla
Rated Current	32A
Rated Voltage	110V ~ 250V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	120mm*63mm*63mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	GB/T to Type1
Rated Current	32A
Rated Voltage	110V ~ 250V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	159mm*75mm*71mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	Type2 to Type1
Rated Current	32A
Rated Voltage	110V ~ 250V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	185mm*63mm*56mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	GB/T to Type2
Rated Current	32A
Rated Voltage	220V ~ 380V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	172mm*65mm*mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	Type2 to GB/T
Rated Current	32A
Rated Voltage	220V ~ 380V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	178mm*65mm*70mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	Type1 to Tesla
Rated Current	32A
Rated Voltage	110V ~ 250V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	81mm*50mm*70mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	Type2 to GB/T
Rated Current	300A
Rated Voltage	1000V DC
Rated Power	250kW
Ingress Protection Rating	IP54
Size	295mm*145mm*95.5mm
Temperature	-30°C to 50°C



Parameter	
Adapter Type	Type1 to Type2
Rated Current	32A
Rated Voltage	110V ~ 250V AC
Rated Power	7kW ~ 22kW
Ingress Protection Rating	IP54
Size	167mm*55mm*71mm
Temperature	-30°C to 55°C



Parameter	
Adapter Type	Type1 to GB/T
Rated Current	300A
Rated Voltage	1000V DC
Rated Power	250kW
Ingress Protection Rating	IP54
Size	282mm*144mm*95.5mm
Temperature	-30°C to 50°C



Parameter	
Adapter Type	
Rated Current	
Rated Voltage	
Rated Power	
Ingress Protection Rating	
Size	
Temperature	



Parameter	
Adapter Type	Type1 to Tesla
Rated Current	32A
Rated Voltage	1000V DC
Rated Power	250kW
Ingress Protection Rating	IP54
Size	185mm*63mm*56mm
Temperature	-30°C to 55°C